

DS-K3G201 Tripod Turnstile



- SUS304 stainless steel material strong and durable.
- Easy to integrate with three party's access controller.
- Built-in access board DS-K2802 and card readers is optional.




▪ Specification

System	
MCBF	> 1 million times
General	
Throughput	More than 30 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550mm
Material	SUS304 stainless steel 1.2 mm, except side door(0.8mm)
Power supply	DS-K3G201-R/Pa-Dm55: 12 VDC, 3 A DS-K3G201-R/M-Dm55: 110~230VAC DS-K3G201-R/Dm55: 110~230VAC
Working humidity	0% to 92% (No condensing)
Dimensions	Without package: 420 mm × 300 mm × 980 mm (16.5" × 11.8" × 38.6") With package: 505 mm × 445 mm × 1055 mm (19.88" × 17.52" × 41.54")
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Application environment	Indoor

▪ Available Model

DS-K3G201-R/Pa-Dm55

▪ Dimension

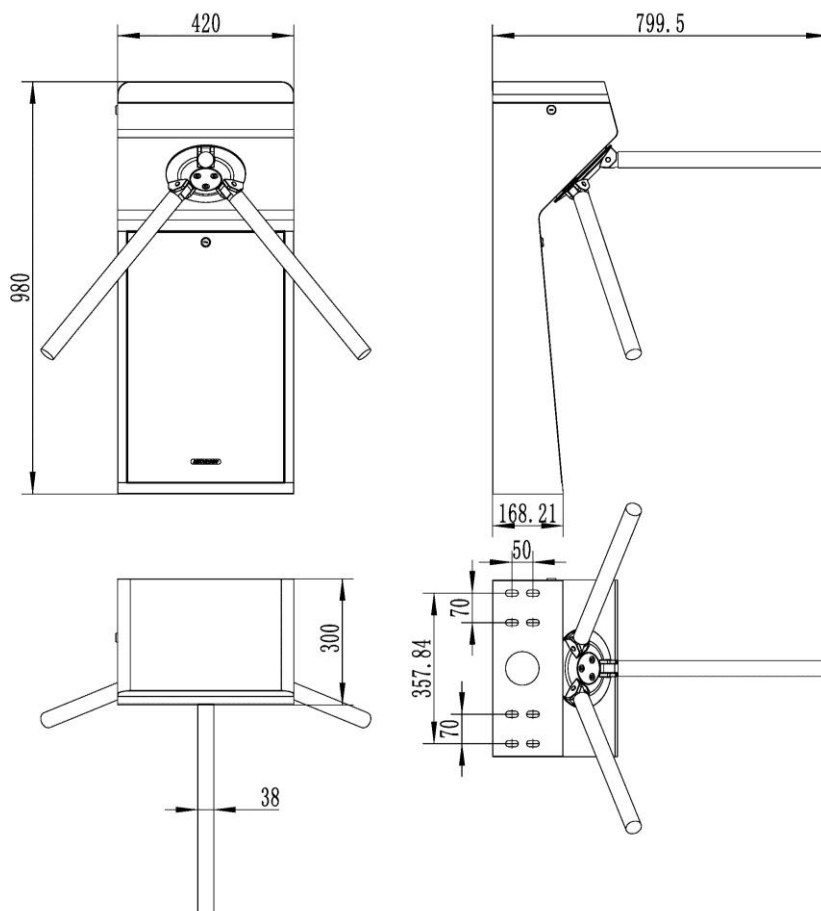



117/8, Changwatthana 10, LakSi, Bangkok 10210
Phone : (66 2) 094-0800
E-mail : sale@bainisys.com
Line Chat : @Bainisys

