

DS-KAD706-P

Video Intercom Two-Wire Distributor Bundle

HIKVISION



Key Feature

- 6 two-wire cascade interfaces, including 1 interface (max. 16 W) used for connecting door station
- 2 cascade interfaces used for cascading DS-KAD706 and DS-KAD706-S
- 8 interface indicators used for displaying network status of interfaces

Approval

Video Audio Distributor

CE-EMC	a. EN 55032:2015 b. EN 61000-3-2:2014 c. EN 61000-3-3:2013 d. EN 50130-4:2011 +A1:2014
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CE-RED	a. EN 201 489-1 V2.1.1, EN 301 489-17 V3.1.1 b. EN 300 328 V2.1.1, EN 62311:2008
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
FCC-ID	a. 47 CFR Part 15, Subpart C
C-TICK(EMC)	AS/NZS CISPR 32:2015
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements
IC (EMC)	a. ICES-003:Issue 6
ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU

Specification

Interfaces	
Network interface	1 RJ45 (1-ch reserved terminal and 1-ch for WAN access)
Two-wire interface	6-ch for device power supply, including 1-ch for door station power supply with max. output power 16 W
Signal indicator	8 signal indicators for indicating 6-ch input and output signal
Power indicator	1
Reset	1
General	
Power supply	Two-wire mode, 24 VDC
Power consumption	< 9 W
Working temperature	-10 °C to +40 °C (14 °F to +104 °F)
Working humidity	10% to 90%
Dimension	143.7mm × 92.4mm × 65.9mm (5.66" × 3.64" × 2.59")


Available Model

DS-KIS706-P

Weight


0.8942Kg

Typical Application

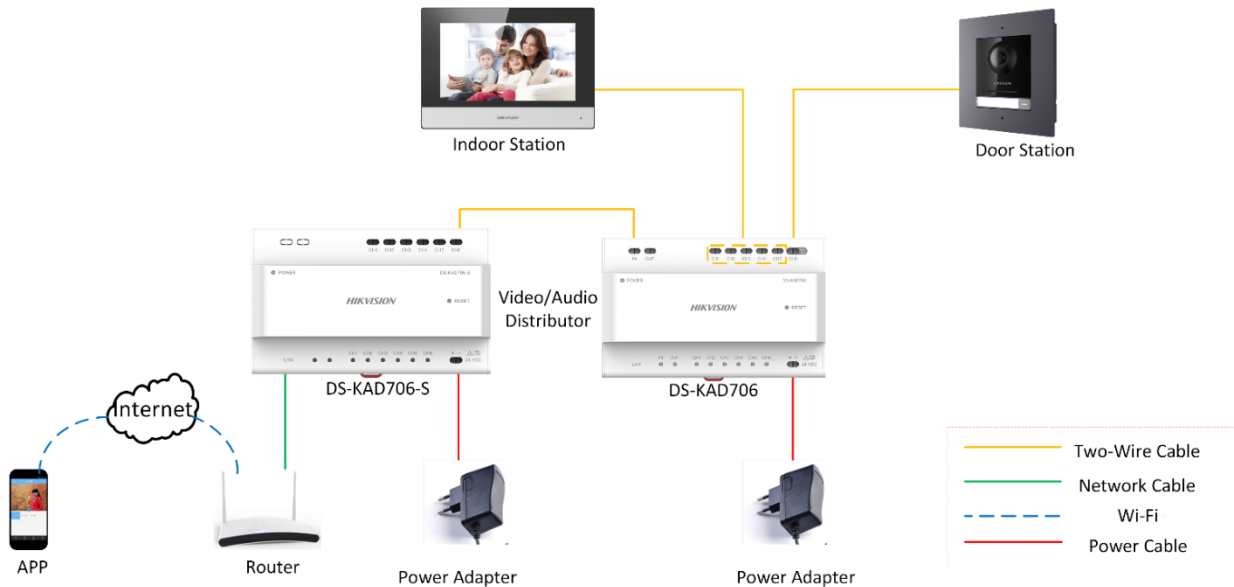

Appearance and Interfaces

Video Audio Distributor

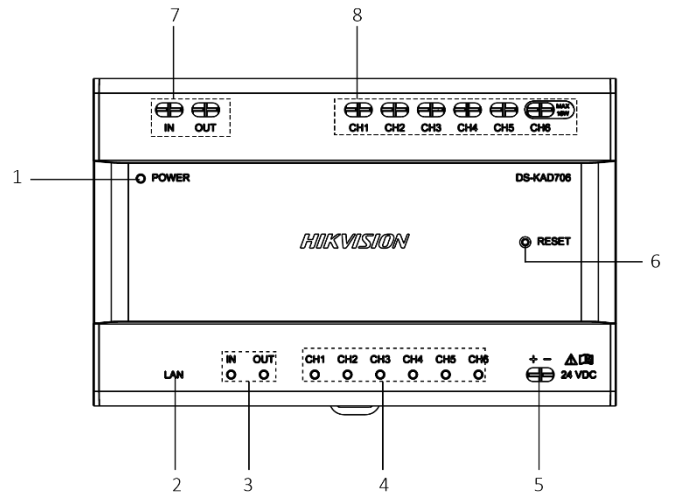

No.	Description	No.	Description
1	Power Indicator	5	Power Input
2	Network Interface	6	Reset Button
3	Cascade Network Indicator	7	Cascade Interface
4	Network Indicator	8	Interface

