



Key Feature


- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- 3.5-inch colorful LCD screen with 480 × 320 resolution
- Unlocks by cards and pin-codes
- Supports configuration via Web remotely

Specification

System parameters	
Operation system	Embedded Linux operation system
Flash	4 GB
RAM	512 MB
CPU	Embedded processor
Display parameters	
Size	3.5-inch
Operation method	Display screen, physical buttons
Type	Colorful LCD
Resolution	480 × 320
Video parameters	
Supplement light	Low illumination, IR supplement lights
Video compression standard	H.264
Lens	2 MP HD camera
FOV	Horizontal: 70°, Vertical: 118°, Diagonal: 132°
WDR	Support

Pixel	Main stream: 1920 × 1080p ,720p Sub stream: 640 × 480
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Fingerprint capacity	/
User capacity	10000
Face capacity	/
Linked indoor station	500
Event capacity	/
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	8

Network interface	1 10/100/1000 Mbps self-adaptive, RJ45 analog interface
TAMPER	1
Exit button	2
RS-485	1
USB	0
Wiegand	1
TF card	/
Alarm output	2
Lock control	1
Door contact input	2
Power interface	1
General	
Button	14 physical buttons
Installation	Flush mounting
Indicator	/
Weight	Without package: 1.05 kg With package: 2.166 kg
Protective level	IP 65
Power supply method	12 VDC
Working temperature	-40 °C to +55 °C (-40 °F to +135 °F)
Working humidity	10% to 95%
Dimensions	357.3 mm × 124.3 mm × 55.3 mm (14.07" × 4.89" × 2.18")
Battery	/
Power supply	≤ 10 W
Application environment	Outdoor

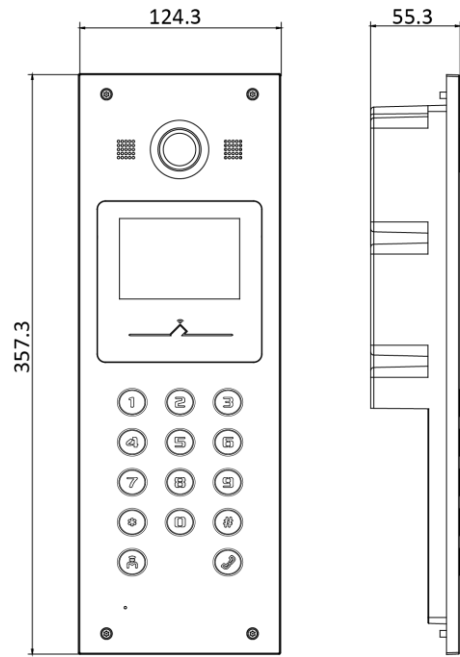

Unit:mm

Available Model

DS-KD3003-E6

Dimension

