

Key Feature

- 2-wire plug & play, easy, cost-efficient
- Receive video call and unlock via indoor station
- 7-inch TFT screen with 1024 × 600 resolution

Specification

System parameters	
Operating system	Embedded Analog operation system
ROM	/
RAM	/
CPU	/
Display parameters	
Screen size	7-inch
Operation method	Non-touch
Type	TFT screen
Resolution	1024 × 600
Video parameters	
Video standard	/
Lens	/
FOV	/
WDR	/
Resolution	/
Focal length	/
Audio parameters	
Audio compression standard	/


Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (more than 80 dB within 20 cm)
Audio compression	/
Audio quality	/
Volume adjustment	Adjustable with touch buttons
Capacity	
Linked network camera capacity	1
Linked indoor extensions capacity	2
Notice capacity	/
Linked doorphone capacity	2
Network parameters	
Communication protocol	/
Wired network	/
Wi-Fi	/
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	/
TAMPER	/

Network interface	/
RS-485	/
USB	/
TF card	/
Alarm output	/
Power interface	3 two-wire interfaces, 2 interfaces supply for door stations, 1 interface supply for indoor extension.
DIP switch	2, ring duration can be set via DIP switch

3	Volume +	10	Loudspeaker
4	Volume -	11	Power Terminal
5	Receive/Dec line	12	DIP Switch
6	Unlock Door 2	13	Debugging Port
7	Unlock Door 1		

General	
Button	6 touch buttons
Installation	Surface mounting
Indicator	/
Weight	With package: 874.4 g Without package: 334.6 g
Protective level	/
Power supply method	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	187 mm × 137 mm × 25.4 mm (7.36" × 5.39" × 1.00")
Battery	/
Power supply	/
Application environment	Indoor
Power consumption	≤ 5 W


Dimension

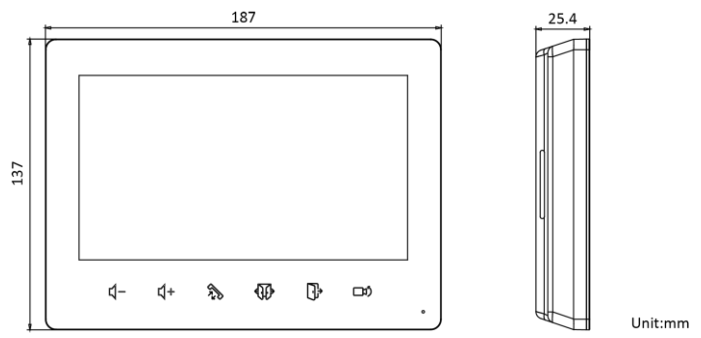

Available Model

DS-KH1200

Physical Interface

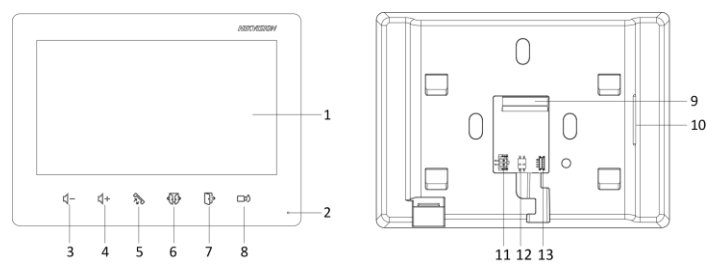

No.	Description	No.	Description
1	Screen	8	Monitor/Switch
2	Microphone	9	Terminals

