

# DS-KH6220-LE1/White

## Video Intercom Network Indoor Station

**HIKVISION**<sup>®</sup>



### Key Feature

- Standard PoE
- 7-inch colorful non-touch screen with resolution 1024 × 600
- Views live video of door stations and linked cameras

### Specification

System parameters	
Operation system	Embedded RTOS operation system
Flash	16 MB
RAM	64 MB
CPU	Embedded processor
Display parameters	
Size	7-inch
Operation method	Physical button
Type	TFT LCD
Resolution	1024 × 600
Video parameters	
Video compression standard	/
Lens	/
FOV	/
WDR	/
Pixel	/
Focal length	/
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U
Audio output	Built-in loudspeaker


Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked IPC	16
Linked indoor extensions	5
Notices	200
Linked doorphone	8
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi	/
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	/
USB	/
TF card	/
Alarm output	/
Power interface	1
General	
Button	4

Installation	Flush mounting, surface mounting
Indicator	/
Weight	With package: 683 g Without package: 355 g
Protective level	/
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%
Dimensions	200 mm × 140 mm × 23.1 mm (7.87" × 5.51" × 0.69")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC, 1 A
Application environment	Indoor
Power consumption	≤ 6 W

## Available Model

DS-KH6220-LE1/White

## Physical Interface

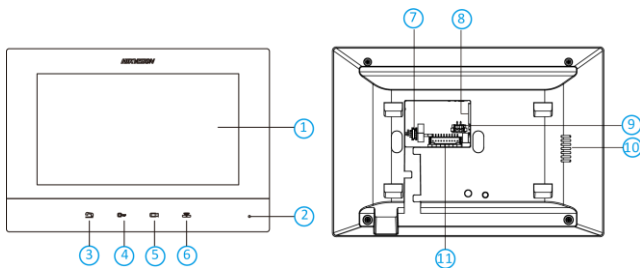

No.	Description	No.	Description
1	Screen	7	Debugging Port
2	Microphone	8	Network Interface
3	Call Button	9	Power Terminal
4	Unlock Button	10	Loudspeaker
5	Monitor Button	11	Alarm Terminal
6	Call Center Button		

## Dimension

