



## Key Feature

- User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Views live video of door stations and linked cameras


## Specification

System parameters	
Operating system	Linux
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capactive touch
Type	TFT LCD
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/

Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200
Notice capacity	16
Linked indoor extensions capacity	5
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive


TAMPER	/
RS-485	/
USB	/
TF card	/
Alarm output	/
Power interface	1
<b>General</b>	
Button	/
Installation	Flush mounting, wall mounting, table mounting
Indicator	/
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC
Application environment	Indoor
Power consumption	≤ 8 W
Weight	Without package: 325 g With package: 649 g
Language	Greek, English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian

## Physical Interface

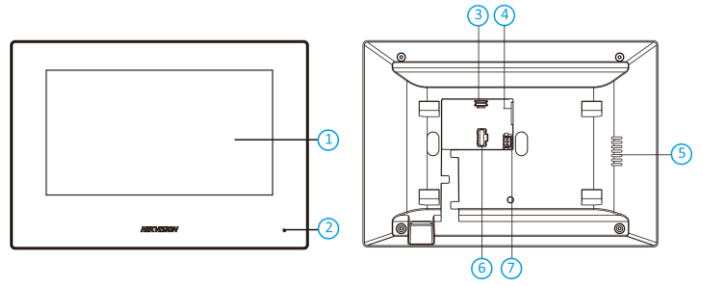

No.	Description	No.	Description
1	Screen	5	Loudspeaker
2	Microphone	6	Alarm Terminal
3	Debugging Port	7	Power Supply Terminal
4	Network Interface		

## Dimension

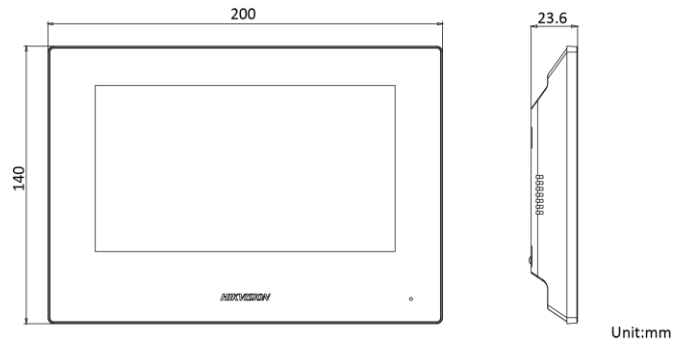

## Available Model

DS-KH6320-LE1(B)

