

DS-KH6320-LE1/White

Video Intercom Network Indoor Station

HIKVISION[®]



Key Feature

- User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Views live video of door stations and linked cameras


Specification

| System parameters | |
|----------------------------|-------------------------------------|
| Operation system | Embedded RTOS operation system |
| Flash | 16 MB |
| RAM | 64 MB |
| CPU | Embedded processor |
| Display parameters | |
| Size | 7-inch |
| Operation method | Capactive touch |
| Type | TFT LCD |
| Resolution | 1024 × 600 |
| Video parameters | |
| Video compression standard | / |
| Lens | / |
| FOV | / |
| WDR | / |
| Pixel | / |
| Focal length | / |
| Audio parameters | |
| Audio compression standard | G.711 U |
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker |

| Audio compression bitrate | 64 Kbps |
|---------------------------|---|
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | |
| Linked IPC | 16 |
| Linked indoor extensions | 5 |
| Notices | 200 |
| Linked doorphone | 8 |
| Network parameters | |
| Communication protocol | TCP/IP, RTSP |
| Wired network | 10/100 Mbps self-adaptive |
| Wi-Fi | / |
| Bluetooth | / |
| 3G/4G | / |
| Zigbee | / |
| Device interfaces | |
| Alarm input | 8 |
| TAMPER | / |
| Network interface | 1 RJ-45 10/100 Mbps self-adaptive |
| RS-485 | / |
| USB | / |
| TF card | / |
| Alarm output | / |
| Power interface | 1 |
| General | |
| Button | / |


| | |
|-------------------------|--|
| Installation | Flush mounting, surface mounting |
| Indicator | / |
| Weight | With package: 683 g Without package: 355 g |
| Protective level | / |
| Working temperature | -10 ° C to 55 ° C (14 ° F to 131 ° F) |
| Working humidity | 10% to 90% |
| Dimensions | 200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59") |
| Battery | / |
| Power supply | IEEE802.3af, standard PoE 12 VDC, 1 A |
| Application environment | Indoor |
| Power consumption | ≤ 6 W |

Physical Interface

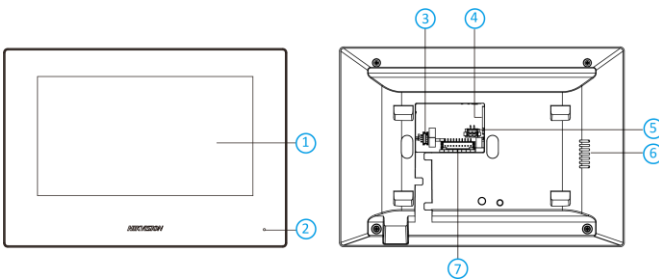

| No. | Description | No. | Description |
|-----|-------------------|-----|----------------|
| 1 | Screen | 5 | Power Terminal |
| 2 | Microphone | 6 | Loudspeaker |
| 3 | Debugging Port | 7 | Alarm Terminal |
| 4 | Network Interface | | |

Dimension

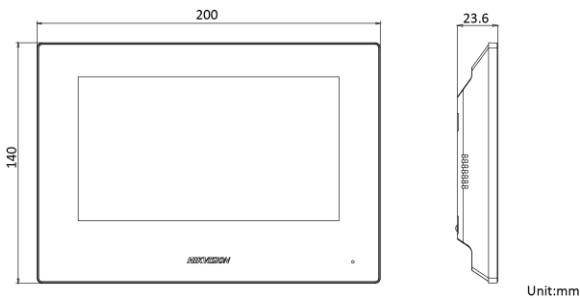

Available Model

DS-KH6320-LE1/White

