


DS-PD1-MC-MS Wired Magnetic Contact

- Metal shell
- Connection type: NC
- Designed for doors or windows

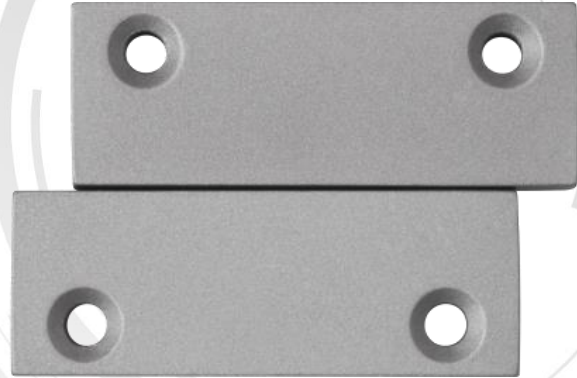

▪ Specification

	Model	DS-PD1-MC-MS
Detection Performance	Detection Gap	≥35
	Interface	Alarm Output
Electrical Characteristics	Typical Voltage	≤100 VDC (Capacity)
	Typical Current	≤500 mA (Capacity)
General	Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Operation Humidity	10% to 90%
	Shell Material	Metal
	Dimension(WxHxD)	50mm x 18mm x 10mm 50mm x 18mm x 10mm

▪ Available Model

DS-PD1-MC-MS

