

DS-PDC10AM-VG3

Wired PIR AM Curtain Detector

- · Slim design for window frame installation
- · IP65 weather resistance for outdoor application
- · Active IR anti-masking
- · Automatic sensitivity
- · Selectable EOL resistors for alarm and tamper-proof wiring
- · Directional detection support



▪ Specification


Model		DS-PDC10AM-VG3
Detection Performance	Detection Method	Passive Infrared
	Detection Range	Wall Mount: 10m Ceiling Mount: 6m
	Detection Angle	5°
	Detection Zones	32
	Detectable Speed	0.2~3m/s
	Sensitivity	Auto
	White Light Filter	6500lux
	Digital Temperature Compensation	Support
	Creep Zone Protection	Support
	Anti-masking	Support
Feature	Digital Processing	Support
	Sealed Optics	Support
	Tamper Protection	Front,Rear
	Directional Detection	Support
Interface	Alarm Output	Normally Closed
	LED Indicator	Blue(Alarm), Green+Orange(Mask)
Transmission	Transmission Method	Wired
Electrical Characteristics	Power Consumption	22mA Max
	Power Supply	9 to 16 VDC
	Typical Voltage	12 VDC
General	Operation Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
	Storage Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
	Operation Humidity	10% to 90%


IP Rate	IP65
Dimension(WxHxD)	29.2mm × 134.4mm × 39.5mm
Weight	77.5g
Mounting Height	2 to 4m
Mounting Method	Wall,Ceiling
Application Scenario	Indoor,Outdoor
Bracket	L-shaped adapter included

▪ Available Model

DS-PDC10AM-VG3

▪ Installation

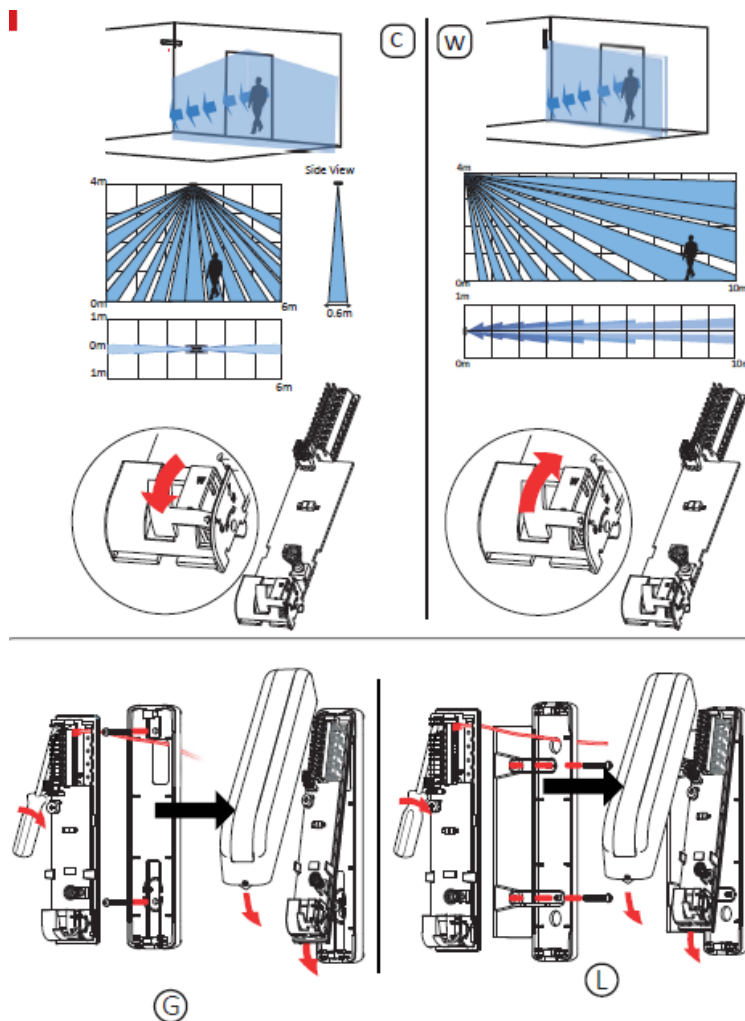

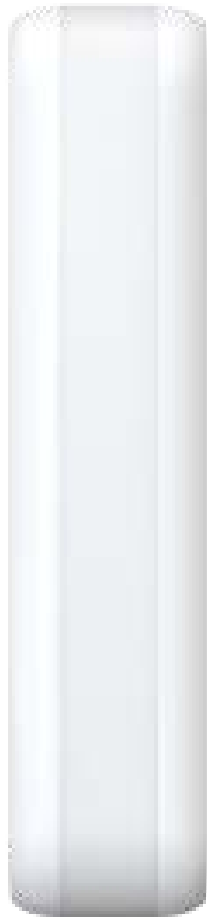

BAINISYS

117/8, Changwatthana 10, LakSi, Bangkok 10210
Phone : (66 2) 094-0800
E-mail : sale@bainisys.com
Line Chat : @Bainisys

