

DS-PDC10DM-VG3 Wired Dual-Tech AM Curtain Detector



- · Slim design for window frame installation
- · IP65 weather resistance for outdoor application
- · Active IR anti-masking
- · Automatic sensitivity
- · Selectable EOL resistors for alarm and tamper-proof wiring
- · Directional detection support



▪ Specification


Model		DS-PDC10DM-VG3
Detection Performance	Detection Method	Passive Infrared, Microwave
	Detection Range	Wall Mount: 10m Ceiling Mount: 6m
	Detection Angle	5°
	Detection Zones	32
	Detectable Speed	0.2~3m/s
	Sensitivity	Auto
	White Light Filter	6500lux
	Microwave Frequency	24GHz(24.15~24.25GHz)
	Digital Temperature Compensation	Support
	Creep Zone Protection	Support
	Anti-masking	Support
Feature	Digital Processing	Support
	Sealed Optics	Support
	Tamper Protection	Front, Rear
	Directional Detection	Support
Interface	Alarm Output	Normally Closed
	LED Indicator	Green(PIR), Red(Microwave), Green+Orange(Mask), Blue(Alarm)
Transmission	Transmission Method	Wired
Electrical Characteristics	Power Consumption	22mA Max
	Power Supply	9 to 16 VDC
	Typical Voltage	12 VDC
General	Operation Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
	Storage Temperature	-25 °C to 60 °C (-13 °F to 140 °F)


Operation Humidity	10% to 90%
IP Rate	IP65
Dimension(WxHxD)	29.2mm × 134.4mm × 39.5mm
Weight	79g
Mounting Height	2 to 4m
Mounting Method	Wall,Ceiling
Application Scenario	Indoor,Outdoor
Bracket	L-shaped adapter included

▪ **Available Model**

DS-PDC10DM-VG3

▪ **Installation**

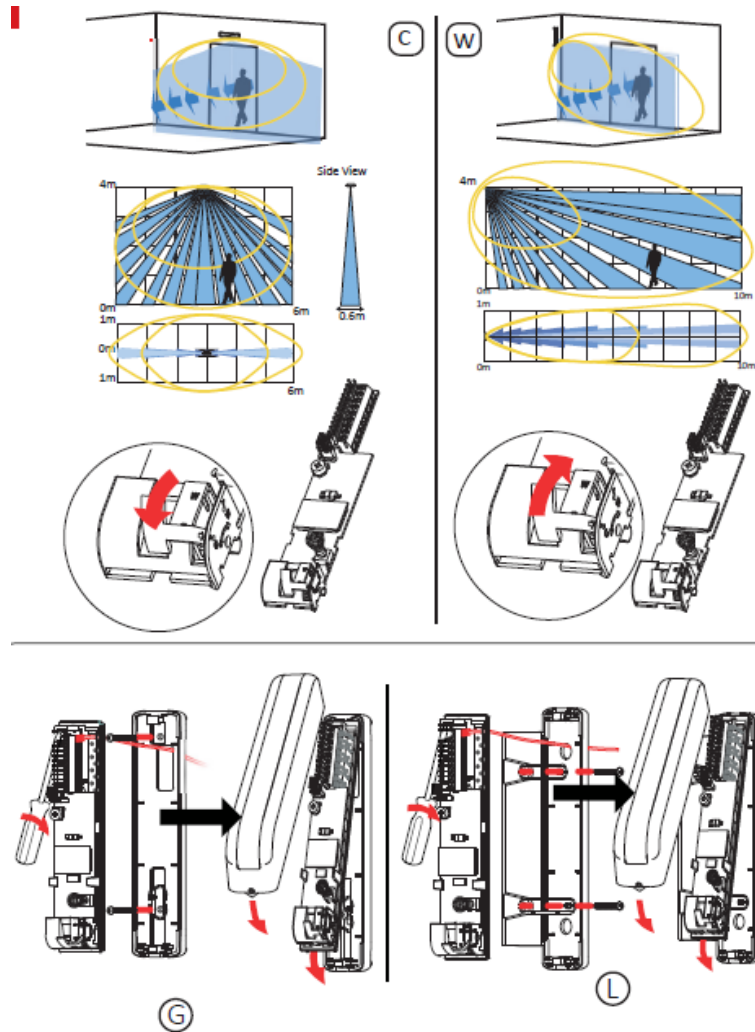

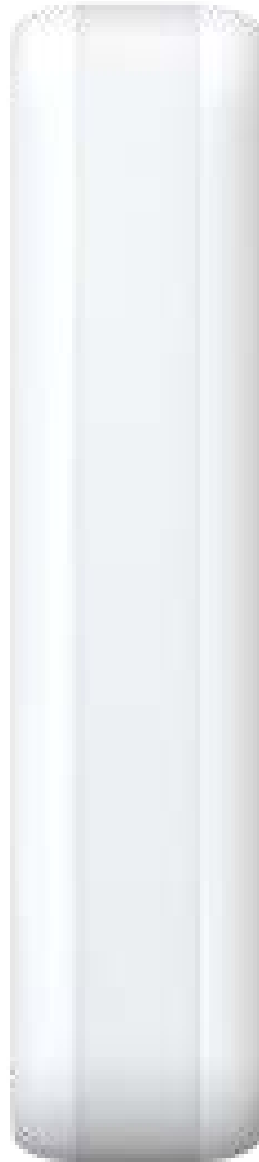

117/8, Changwatthana 10, LakSi, Bangkok 10210
Phone : (66 2) 094-0800
E-mail : sale@bainisys.com
Line Chat : @Bainisys

