

DS-PDPG12P-EG2-WE

- PIR Detection Range: 12m / 85.9°
- Glass Break Range: 8m / 120°
- Up to 30KG pet immunity
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected

▪ Specification

| Detection Performance | |
|-----------------------------------|---|
| Detection Method | Passive Infrared,Acoustic Sensor |
| Detection Range | 12 m |
| Detection Angle | 85.9° |
| Detection Zones | 52 |
| Detectable Speed | 0.3 ~ 2 m/s |
| Pet Immunity | 30 Kg |
| White Light Filter | 6500 lux |
| PIR Sensitivity | Auto, High, Pet |
| Glass Type | Float, Plate, Tempered, Wired, Laminated Leaded, Double Glazing |
| Glass Break Range | 8 m |
| Glass Break Sensitivity | 2 m, 4 m, 6 m, 8 m |
| Glass Thickness | 2.4 mm to 6.4 mm |
| Glass Size | 0.3 m x 0.3 m to 3 m x 3 m |
| Digital Temperature Compensation | Support |
| Creep Zone Protection | Support |
| Feature | |
| Digital Processing | Support |
| Sealed Optics | Support |
| Tamper Protection | Front, Rear |
| Environment Temperature Indicator | Support |
| Signal Strength Indicator | Support |
| Interface | |
| Power Switch | Power Up Enrolling |
| LED Indicator | Green(PIR), Red(BG), Blue(alarm) |
| Transmission | |
| Transmission Technology | Tri-X Wireless |
| Transmission Method | Two-Way RF Wireless |
| Transmission Frequency | 868 MHz |
| Transmission Security | AES-128 Encryption |
| Transmission Range(Free Space) | 1.6 Km |
| Frequency Hopping | Support |
| Enrolling Method | Power up, Remote ID, QR Code |
| Electrical Characteristics | |
| Standard Battery Life | 4 years in work status (being triggered 20 times per day) |
| Power Supply | Battery Powered |
| Battery Type | CR123A × 2 |
| Typical Voltage | 3 V |
| General | |
| Operation Temperature | -10 °C to 55 °C (14 °F to 131 °F) |


| | |
|----------------------|-----------------------------------|
| Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| Operation Humidity | 10% to 90% |
| Dimension(W × H × D) | 65.5 mm × 103 mm × 48.5 mm |
| Weight | 134 g |
| Mounting Height | 1.8 to 2.4 m |
| Mounting Method | Wall |
| Application Scenario | Indoor |
| Bracket | Optional Wall & Ceiling Accessory |

▪ **Available Model**


DS-PDPG12P-EG2-WE

▪ **Installation**

Choose the right location

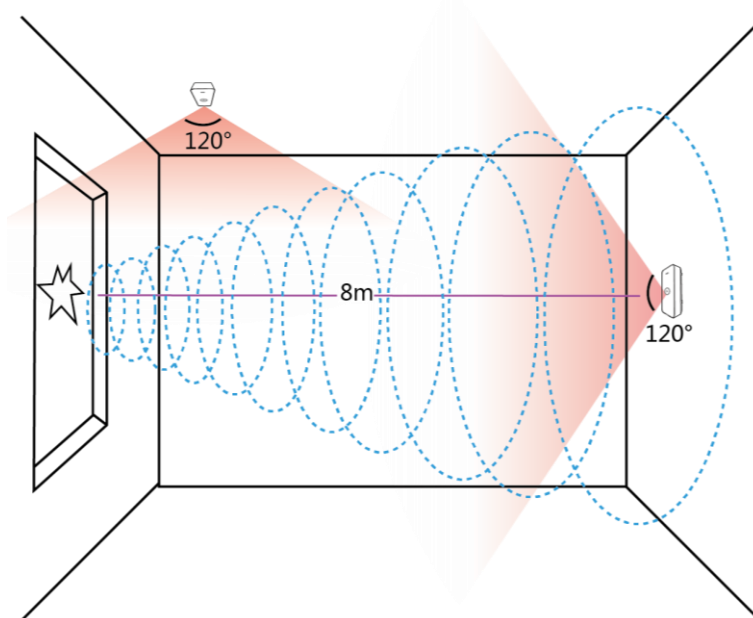

Properly test the detector after installation

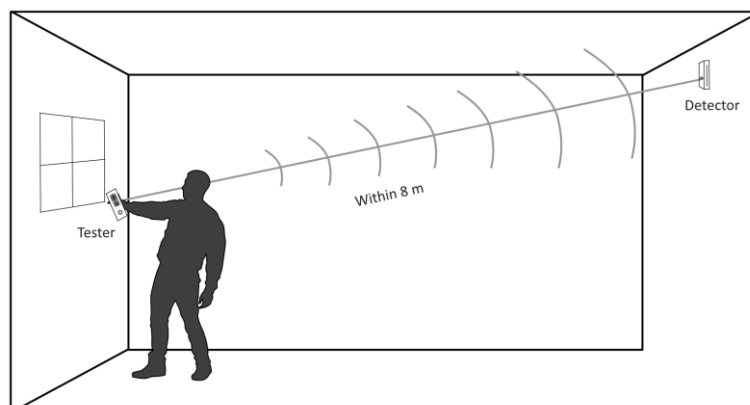

Note:



You should use the matching tester.

Warning:

1. Avoid mounting the detector on the same wall as the protected glass.
2. Avoid mounting the detector in rooms with noisy equipment (air compressors, power tools, bells, etc.)
3. Avoid mounting the detector in humid rooms (bathroom, etc.)
4. Avoid mounting the detector on the wall with strong vibration.

▪ **Accessory**

▪ **Optional**

| DS-PDB-IN-Ceiling bracket Internal ceiling mounted bracket | DS-PDB-IN-Wall bracket Internal wall mounted bracket |
|---|---|
|  |  |

