

## DS-K5671-ZH Face Recognition Terminal



The face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Face recognition terminal for turnstile
- Built-in IO output or Wiegand output to communicate with the third-party turnstile
- 7 inch LCD Touch Screen, 2 M camera
- Max. 50,000 faces, and Max. 100,000 events
- Face recognition distance: 0.3 m to 3 m; Face recognition duration  $< 0.2$  s/User; Accuracy rate  $\geq 99\%$
- TCP/IP, Wi-Fi communication
- Remote live view via RTSP protocol
- Indoor use



## ▪ Specification


<b>Display</b>	
Dimensions	7-inch
Operation method	Capacitive touch screen
<b>Video</b>	
Pixel	2 MP
Lens	2
<b>Network</b>	
Communication protocol	TCP/IP; SIP; RTSP; HikCentral Pro OpenAPI; Hik-ProConnect OpenAPI
Wired network	10 M/100 M/1000 M self-adaptive
Wi-Fi	Support
<b>Interface</b>	
Network interface	1
Lock output	1
Door contact input	1
<b>Capacity</b>	
Face capacity	50,000
Event capacity	100,000
<b>Authentication</b>	
Face recognition duration	< 0.2 s per person
Face recognition accuracy rate	≥ 99%
Face recognition accuracy rate	0.3 to 3 m
<b>Function</b>	
QR code recognition	The dimension of the recognized QR code picture should be larger than 6 cm × 6 cm.
Audio prompt	Support
Time synchronization	Support
<b>General</b>	
Power supply	12 VDC/ 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional

## ▪ Available Model

DS-K5671-ZH

## ▪ Dimension

▪ **Dimension**

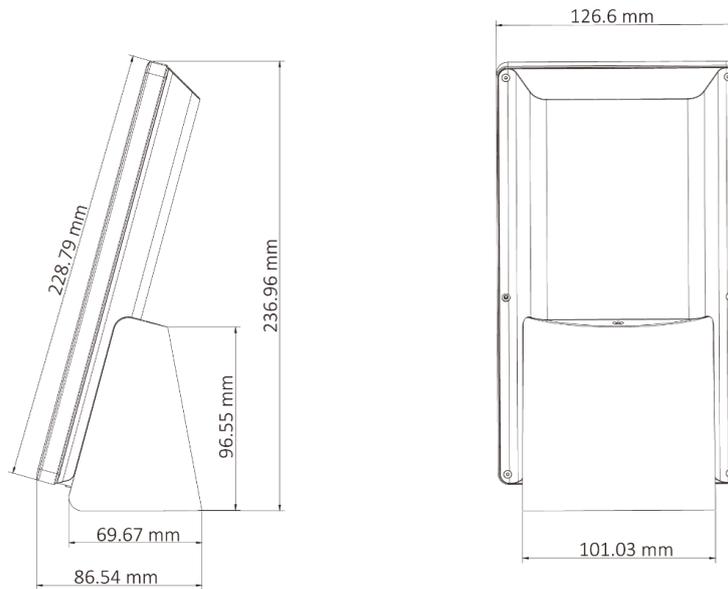

▪ **Accessory**

▪ **Optional**

<p><b>DS-K3B601</b> Pro Series Swing Barrier</p>	<p><b>DS-K3B801#CD</b></p>	<p><b>DS-KAB5671-S</b> Protective Shield</p>	<p><b>DS-K3B801</b> Pro Series Swing Barrier</p>
			
<p><b>DS-K3B801A</b> Pro Series Swing Barrier</p>	<p><b>DS-K3B601A</b> Pro Series Swing Barrier Plus</p>	<p><b>DS-KAB5671-S</b> Protective Shield</p>	
			

