




The DS-PM-MO4-H is MBUS 4 outputs expander. It can control 4-ch of normally open (NO) or normally closed (NC) relay output when connecting to the control panel via MBUS .






## **INSTRUCTION**

- Power off both the module and control panel and set the DIP address on the module before installation.
- DIP address: 1~253. (Different expanders can't use same address)
- Power on the module before powering on the control panel.
- MBUS non-polarity

## **PHYSICAL INTERFACE**

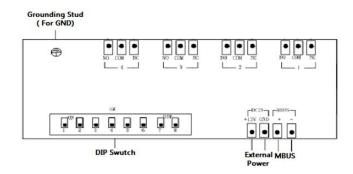



117/8, Changwatthana 10, LakSi, Bangkok 10210

Phone: (66 2) 094-0800 E-mail: sale@bainisys.com

Line Chat: @Bainisys

