

DS-PM-RS18

RS485 8 Inputs Expander

The DS-PM-RS18 is RS485 8 inputs expander which used with security control panel via RS-485.

It supports Normally Open (NO) or Normal Close (NC) monitoring inputs with the wiring of 2.2K/3.3K/5.6K/8.2K terminal resistances (EOL).

It supports tamper alarm (with the wiring of 2.2K EOL only).




MAIN FEATURES

- Supports remote upgrade via client software
- Supports multiple terminal resistances (EOL)
- LED Indicator: communication, status and running

SPECIFICATIONS

| Model | DS-PM-RS18 |
|-----------------------|---|
| Alarm Input | 8ch, supports tamper alarm |
| Tamper Switch | 1 |
| RS485 Interface | 1 |
| Dial Switch | 5, Binary dialing |
| Indicator | 3 Red/Green LED: communication, status, running |
| Power Supply | 12V |
| Consumption | ≤2W |
| Working Temperature | -10°C ~ +55°C |
| Working Humidity | 10% ~ 90% |
| Dimensions(L x W x H) | 132.5mm x 74mm x 28mm |
| Weight | <1kg |

PHYSICAL INTERFACE

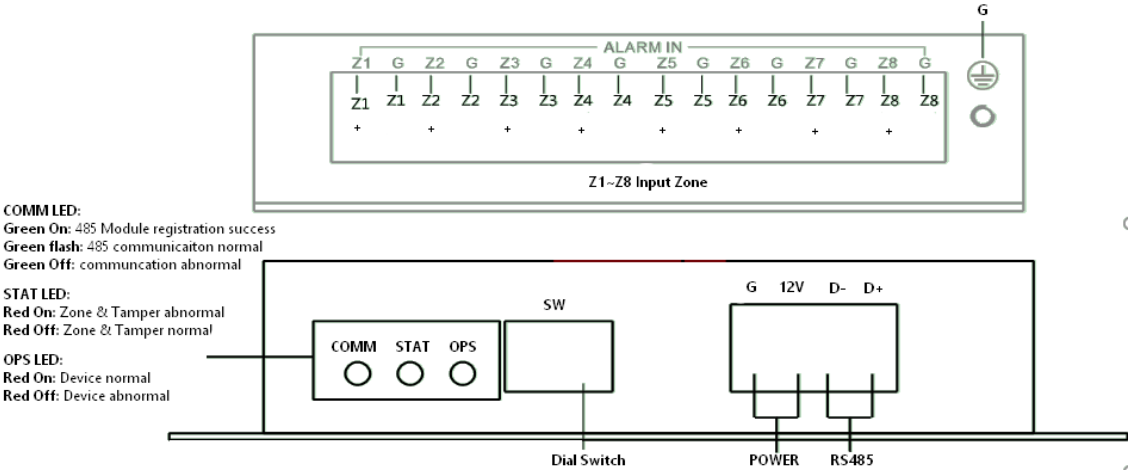

117/8, Changwatthana 10, LakSi, Bangkok 10210
Phone : (66 2) 094-0800
E-mail : sale@bainisys.com
Line Chat : @Bainisys

